

**NEW!**

# Liberty Pumps®

# StormCell®

## PC 442-Series



### Sump Pump Combo Series

Pre-assembled Primary  
Pump and Battery  
Backup System

Drop-in-the-pit ready

#### Features:

- Provides uninterrupted pumping in the event of a power outage or main pump failure
- Fully assembled
- Primary pumps available in 1/3 and 1/2 HP
- Ready to connect to 1-1/2" discharge pipe
- Primary pump and backup pump check valves included
- StormCell® 442-Series backup system includes:
  - Audible and visual alarm with super-bright LED alarm
  - Energy efficient 12 V DC pump (manufactured in the US by Liberty)
  - Professional -grade 10 A charger/controller
  - Battery box (fits Group 27 or 31 batteries)
  - User interface with LCD readout
  - Compact float system
  - Silence and Test buttons
  - Auxiliary contacts
- Suitable with AGM, Wet Cell or Gel type batteries (not included) Liberty StormCell® batteries recommended for optimum performance



**NightEye®**  
Wireless Enabled  
Model Available

# PC 442-Series


## Sump Pump Combo Series



Models	Description	Primary Pump	NightEye Wireless Enabled	System Weight
PC237-442-10A	Model 237 and 442	1/3 HP, 115 V, 5.2 A	No	30 lbs
PC257-442-10A	Model 257 and 442	1/3 HP, 115 V, 5.2 A	No	42 lbs
PC457-442-10A	Model 457 and 442	1/2 HP, 115 V, 7.3 A	No	32 lbs
PCS37-442-10A	Model S37 and 442	1/3 HP, 115 V, 6.2 A	No	33 lbs
PCS37-P-442-10A	Model S37-P and 442	1/3 HP, 115 V, 6.2 A	No	33 lbs
PC237-442-10A-EYE	Model 237 and 442	1/3 HP, 115 V, 5.2 A	Yes	30 lbs
PC257-442-10A-EYE	Model 257 and 442	1/3 HP, 115 V, 5.2 A	Yes	42 lbs
PC457-442-10A-EYE	Model 457 and 442	1/2 HP, 115 V, 7.3 A	Yes	32 lbs
PCS37-442-10A-EYE	Model S37 and 442	1/3 HP, 115 V, 6.2 A	Yes	33 lbs
PCS37-P-442-10A-EYE	Model S37-P and 442	1/3 HP, 115 V, 6.2 A	Yes	33 lbs

Minimum pit size for all above systems 18" diameter x 18" deep. For complete primary pump specifications see appropriate 230-Series, 250-Series, 450-Series or S30-Series literature. For complete back-up pump specifications see StormCell® 442-Series literature.

### Primary Pump Performance

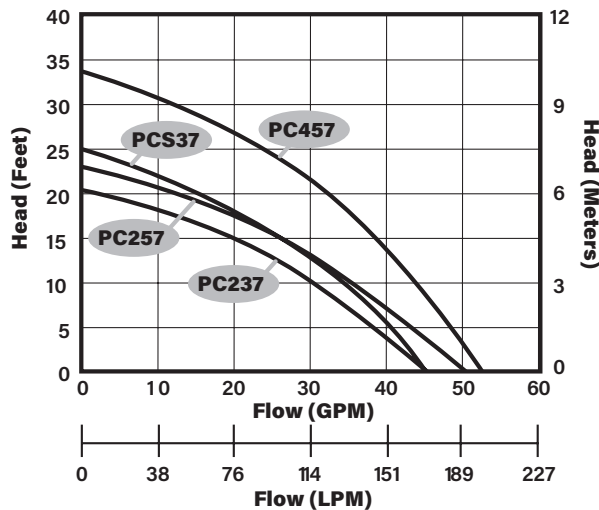


### Included in complete system

- Primary Pump, 115 V
- 442-10A backup pump system
- 1-1/2" PVC piping with rubber coupler between primary pump and back-up pump (rubber coupler provides easy removal and serviceability of back-up pump)
- Check valve included on primary pump and back-up pump
- Completely assembled
- Maximum fluid temperature 140° F
- Battery not included. 12-volt deep cycle battery Group 27 or 31 recommended


For optimum performance, Liberty StormCell® batteries recommended

### Primary Pump Options

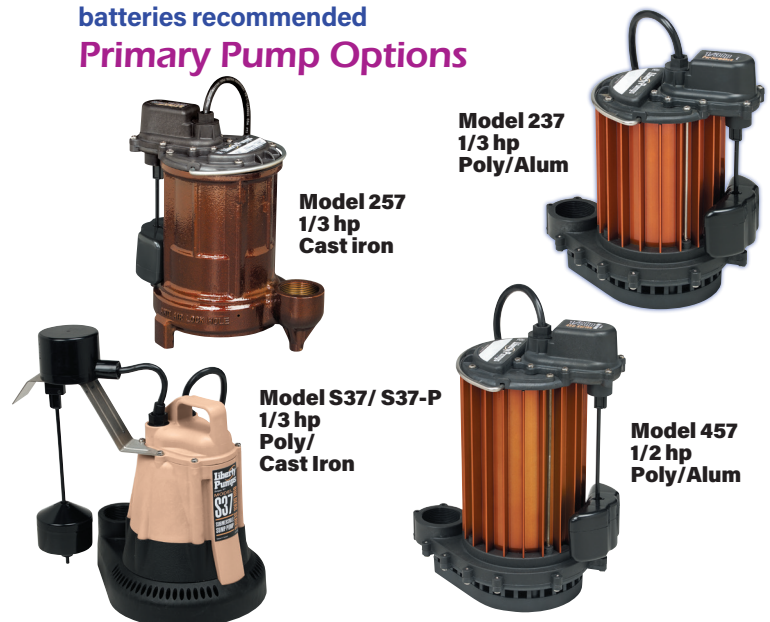

### Back-Up Pump Performance

Model 442-10A

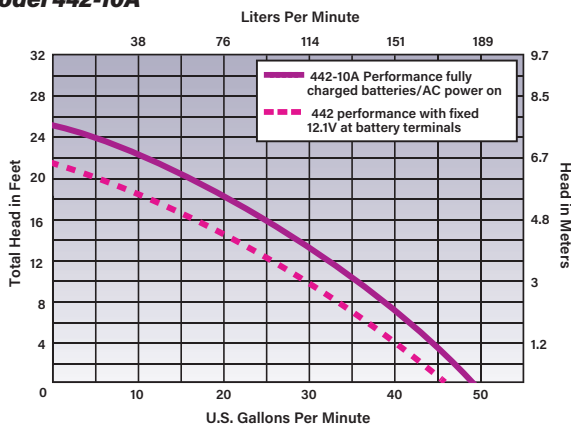

Liberty Pumps ■ 7000 Apple Tree Avenue ■ Bergen, New York 14416 ■ Phone 800-543-2550 ■ Fax 585-494-1839

**LibertyPumps.com**